
# PARTS LIST FOR SANSUI SPEAKER SYSTEM

Ref No. USP-45

## **PM-C70**

Sansui

#### 1. FRONT VIEW

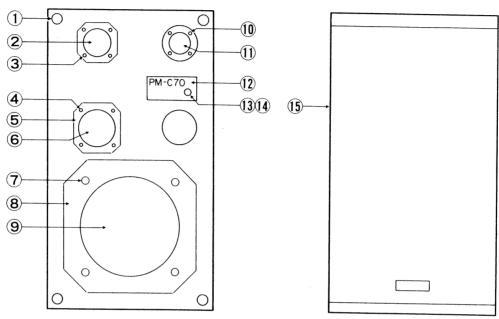

Dante	1:04
Parts	LIST


Parts No.	Stock No.	Description
1	14304900	Latch
2	14288100	T-207, Tweeter
3	14305100	Hex Socket Wood Screw, M4 x 20
4	14305100	Hex Socket Wood Screw, M4 × 20
5	14304700	Dress Ring for S-171
6	14288000	S-171, Midrange
7	14310700	Hex Socket Wood Screw, M6 x 30


Parts No.	Stock No.	Description
8	14304800	Dress Ring for W-245
9	14287900	W-245, Woofer
10	14305100	Hex Socket Wood Screw,
		M4 × 20
11	14288200	T-208, Super Tweeter
12	14310200	Name Plate
13-1	14310300	Knob(big), high range switch
13-2	14310400	Knob(small), high range switch
14	14310500	High Range Switch
15	14304300	Front Grille Ass'y
	14304600	2P Input Terminal

#### 2. SPECIFICATIONS

Speakers used           Woofer         250 mm (9-27/32") PMC           Cone-type         100 mm (3-15/16") PMC           Cone-type         100 mm (3-15/16") PMC	Crossover frequency       3.5 kHz, 10 kHz, 15 kHz         Finish       Maple grain vinyl         Dimensions       330 mm (13") Width         590 mm (23-7/32") Height
Tweeter	307 mm (12-3/32") Depth 395 mm (15-9/16") Packed width 675 mm (26-9/16") Packed heigh 325 mm (12-25/32") Packed dept Weight
Crossover network	<ul> <li>Design and specifications subject to change without notice for improvements.</li> </ul>

### 3. CROSSOVER NETWORK

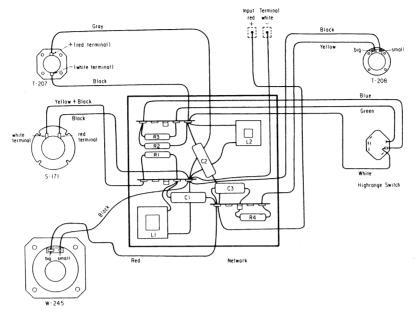




Parts List < Crossover Network>

Parts No.	Stock No.	Description	
C1	14176600	6.8µF 50V E.B.	
C2	14289300	2.2μF 50V E.B.	
C3	14175400	1.0μF 50V E.B.	
R1	14305700	3.3 <b>Ω</b> 4W Ce.R.	
R2	14305800	4.7Ω 4W Ce.R.	
R3	14305900	33Ω 4W Ce.R.	
, R4	14305700	3.3 <b>Ω</b> 4W Ce.R.	
L1	14304400	Inductor, 0.62mH	
L2	14304500	Inductor, 0.33mH	

E.B.: Bi-Polar Electrolytic Capacitor Ce.R.: Cement Resistor

#### 4. PACKING PARTS LIST



Parts List < Packing>

Parts No.	Stock No.	Description
1	14305400	Styrofoam Packing
2	14305500	Packing
3	14305300	Carton Case

#### 5. ACCESSORY PARTS LIST

Stock No.	Description
46529600	Operating Instruction
14305600	Speaker Cord